VEHICLE AND FRAME HEIGHT CHARTS

S/T MIDSIZE TRUCK

S/T 15403 Midsize Regular Cab Pickup 1

Heights (To Ground) 1

111.0” Wheelbase – S 15403 2

111.0” Wheelbase – T 15403 2

S/T 15653 Midsize Extended Cab Pickup 3

Heights (To Ground) 3

126.0” Wheelbase – S 15653 4

126.0” Wheelbase – T 15653 4

S/T 15643 Midsize Crew Cab Pickup 5

Heights (To Ground) 5

126.0” Wheelbase – S 15643 6

126.0” Wheelbase – T 15643 6

S/T 15603 Midsize Chassis Cab 7

Heights (To Ground) 7

126.0” Wheelbase – S 15603 8

C/K FULLSIZE TRUCK

C/K Fullsize Pickups 9

Heights (To Ground) 9

C/K Fullsize Chassis-Cabs 10

Heights (To Ground) 10

119.0” Wheelbase – C 15703 11

133.0” Wheelbase – C 15903 11

143.5” Wheelbase – C 15753 11

157.5” Wheelbase – C 15953 12

143.5” Wheelbase – C 15543 12

VEHICLE AND FRAME HEIGHT CHARTS

C/K FULLSIZE TRUCK – (Continued)

153.0” Wheelbase – C 15743....12
119.0” Wheelbase – K 15703....13
133.0” Wheelbase – K 15903....13
143.5” Wheelbase – K 15753....14
157.5” Wheelbase – K 15953....15
153.0” Wheelbase – K 15543....15

C/K 25000 Fullsize Pickups & Chassis-Cabs

133.0” Wheelbase – C 25903....16
143.5” Wheelbase – C 25753....16
157.5” Wheelbase – C 25953....17
143.5” Wheelbase – C 25743....17
157.5” Wheelbase – C 25943....17
133.0” Wheelbase – K 25903....18
143.5” Wheelbase – K 25753....18
157.5” Wheelbase – K 25953....19
153.0” Wheelbase – K 25743....19
167.0” Wheelbase – K 25943....20

C/K 35000 Fullsize Pickups & Chassis-Cabs

157.5” Wheelbase – C 35953....20
167.0” Wheelbase – C 35943....20
133.0” Wheelbase – K 35903....21
157.5” Wheelbase – K 35953....21
167.0” Wheelbase – K 35943....22

C/K 36000 Fullsize Chassis-Cabs

137.0” Wheelbase – C 36003....22

VEHICLE AND FRAME HEIGHT CHARTS

C/K FULLSIZE TRUCK – (Continued)

161.5” Wheelbase – C 36053....22
161.5” Wheelbase – C 36403....23
137.0” Wheelbase – K 36003....23
161.5” Wheelbase – K 36053....23
161.5” Wheelbase – K 36403....24

C/K 15000/25000 Fullsize Utility....25

Heights (To Ground)....25
116.0” Wheelbase – C 15706....26
130.0” Wheelbase – C 15906....27
116.0” Wheelbase – K 15706....28
130.0” Wheelbase – K 15906....29
130.0” Wheelbase – C 25906....29
130.0” Wheelbase – K 25906....30

C/K 15000/25000 Fullsize Avalanche....31

Heights (To Ground)....31
130.0” Wheelbase – C 15936....32
130.0” Wheelbase – K 15936....32
130.0” Wheelbase – K 25936....32

G/H FULLSIZE VAN

G/H Full Body Van....33

Heights (To Ground)....33
135.0” Wheelbase – G 13405....34
135.0” Wheelbase – G 13406....34
135.0” Wheelbase – H 13405....35
135.0” Wheelbase – H 13406....35

VEHICLE AND FRAME HEIGHT CHARTS

G/H FULLSIZE VAN – (Continued)

135.0” Wheelbase – G 23405 36
135.0” Wheelbase – G 23406 36
155.0” Wheelbase – G 23705 37
135.0” Wheelbase – H 23405....37
135.0” Wheelbase – G 33405 38
135.0” Wheelbase – G 33406 38
155.0” Wheelbase – G 33705 38
155.0” Wheelbase – G 33706 39
G/H Fullsize Cutaway Van 40
Heights (To Ground) 40
139.0” Wheelbase – G 33503 41
159.0” Wheelbase – G 33803 41
177.0” Wheelbase – G 33903 42

VEHICLE AND FRAME HEIGHT CHARTS

S/T 15403 Midsize Regular Cab Pickup

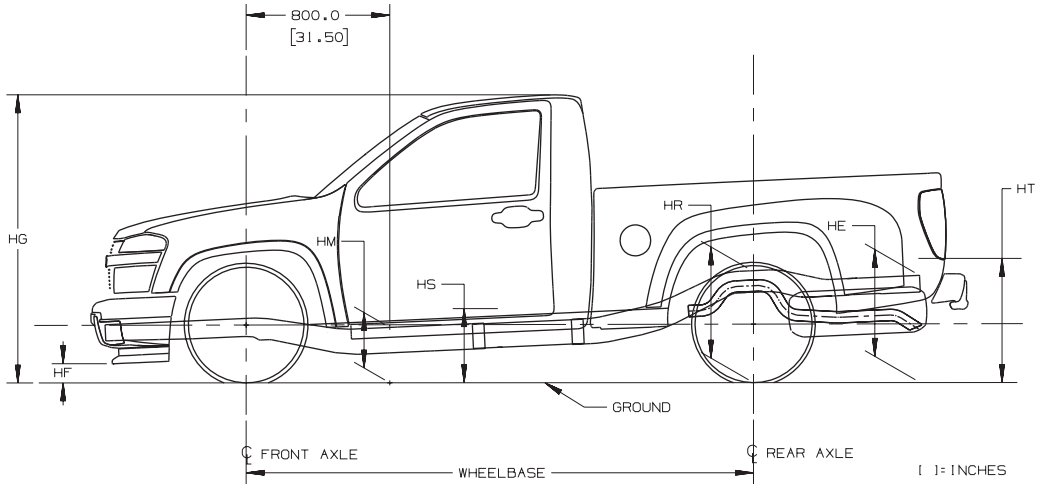

TD006095a

Heights (To Ground)

HF .....Bottom of Front Air Deflector or Bumper

HG .....Roof Height

HM .....Normal Top of Frame

HP .....Top of Tailgate (Down)

HR .....Top of Frame at Centerline of Rear Axle

HS .....Step H-Point-Front

HS2 .....Step H-Point-Second

HT .....Rear Cargo Load Height

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

VEHICLE AND FRAME HEIGHT CHARTS

S 15403	111.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 4400 **& ZQ8** P235/50R17	1896	1461	3357	2533	2447	–	9.4	63.1	13.3	–	23.7	16.9	–	25.8	–	7.2	61.5	11.4	–	21.0	15.2	–	21.9
[1] 4400 **& ZQ8** P235/50R18	1896	1461	3357	2533	2447	–	10.0	63.8	13.9	–	24.3	17.6	–	26.5	–	7.9	62.1	12.1	–	21.7	15.8	–	22.6
[2] 4850 **& Z85** P225/75R15	1823	1448	3271	2533	2896	–	11.4	65.5	15.5	–	26.1	19.2	–	28.5	–	9.2	63.0	13.1	–	22.4	16.8	–	23.1
[2] 4850 **& Z85** P205/75R15	1823	1448	3271	2533	2896	–	10.9	65.0	15.0	–	25.7	18.7	–	28.0	–	8.7	62.5	12.6	–	21.9	16.3	–	22.5
[2] 5150 **& Z71** P265/75R15	1832	1517	3349	2753	2896	–	14.7	69.0	18.9	–	29.8	22.7	–	32.2	–	11.9	66.5	16.3	–	26.3	20.2	–	27.8

T 15403	111.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 5150 **& Z85** P235/75R15	2049	1610	3659	2753	2896	–	13.9	68.2	18.1	–	28.9	21.9	–	31.3	–	11.8	66.1	16.0	–	25.7	19.8	–	26.9
[2] 5150 **& Z71** P265/75R15	2074	1640	3714	2753	2896	–	14.6	68.9	18.8	–	29.7	22.6	–	32.1	–	12.6	66.9	16.8	–	26.5	20.6	–	27.7

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

S/T 15653 Midsize Extended Cab Pickup

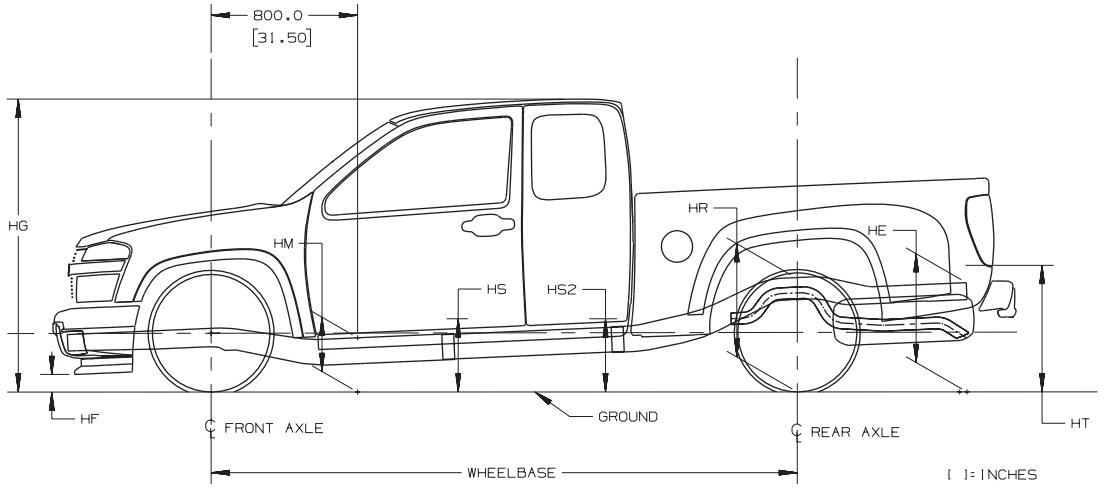

TD006095b

Heights (To Ground)

HF .....Bottom of Front Air Deflector or Bumper

HG .....Roof Height

HM .....Normal Top of Frame

HP .....Top of Tailgate (Down)

HR .....Top of Frame at Centerline of Rear Axle

HS .....Step H-Point-Front

HS2 .....Step H-Point-Second

HT .....Rear Cargo Load Height

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

VEHICLE AND FRAME HEIGHT CHARTS

S 15653	126.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 4600 **& ZQ8** P235/50R17	1945	1602	3547	2533	2447	—	9.5	63.3	13.2	—	23.7	16.8	17.1	25.4	—	7.5	61.6	11.4	—	21.2	15.0	15.3	22.4
[1] 4600 **& ZQ8** P235/50R18	1945	1602	3547	2533	2447	—	10.1	64.0	13.8	—	24.3	17.4	17.7	26.0	—	8.2	62.3	12.1	—	21.9	15.7	16.0	23.1
[2] 5000 **& Z85** P225/75R15	1871	1593	3464	2533	2896	—	11.5	65.6	15.4	—	26.1	19.0	19.4	27.9	—	9.5	63.3	13.2	—	22.6	16.7	17.0	23.6
[2] 5000 **& Z85** P205/75R15	1871	1593	3464	2533	2896	—	11.1	65.1	14.9	—	25.6	18.6	18.9	27.4	—	9.0	62.8	12.7	—	22.1	16.2	16.5	23.1
[2] 5300 **& Z71** P265/75R15	1889	1673	3562	2753	2896	—	15.0	68.8	18.7	—	29.1	22.2	22.5	30.8	—	12.4	66.0	16.0	—	25.5	19.5	19.7	26.7

T 15653	126.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 5300 **& Z85** P235/75R15	2200	1649	3849	2753	2896	—	14.1	67.8	17.8	—	28.1	21.3	21.6	29.7	—	12.7	65.5	15.8	—	24.6	19.1	19.2	25.4
[1] 5300 **& Z71** P265/75R15	2224	1679	3903	2753	2896	—	14.9	68.5	18.5	—	28.7	22.0	22.2	30.4	—	13.5	66.3	16.6	—	25.3	19.9	20.0	26.1

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

S/T 15643 Midsize Crew Cab Pickup

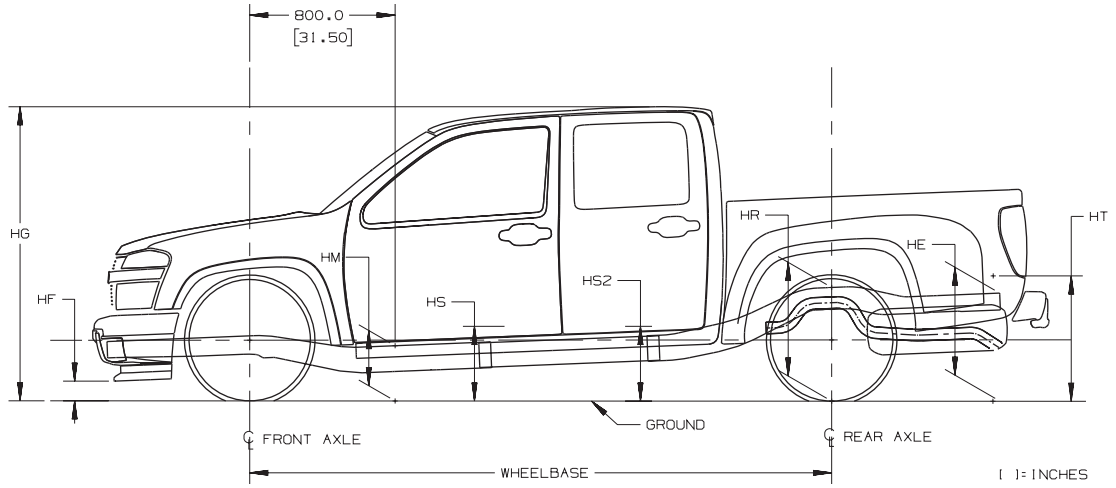

TD006095c

Heights (To Ground)

HF .....Bottom of Front Air Deflector or Bumper

HG .....Roof Height

HM .....Normal Top of Frame

HP .....Top of Tailgate (Down)

HR .....Top of Frame at Centerline of Rear Axle

HS .....Step H-Point-Front

HS2 .....Step H-Point-Second

HT .....Rear Cargo Load Height

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

VEHICLE AND FRAME HEIGHT CHARTS

S 15643	126.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 4900 **& ZQ8** P235/50R17	2056	1684	3740	2533	2447	–	9.4	63.6	13.1	–	23.6	16.7	17.3	25.3	–	8.0	61.7	11.5	–	21.3	14.9	15.3	22.8
[2] 4900 **& ZQ8** P235/50R18	2056	1684	3740	2533	2447	–	10.1	64.3	13.8	–	24.3	17.4	17.9	26.0	–	8.7	62.4	12.2	–	22.0	15.6	16.0	23.4
[2] 5000 **& Z85** P225/75R15	1974	1661	3635	2533	2896	–	11.5	66.0	15.4	–	26.0	19.0	19.6	27.8	–	9.8	63.8	13.4	–	22.7	16.9	17.2	23.7
[2] 5300 **& Z71** P265/75R15	2010	1759	3769	2753	2896	–	14.9	69.1	18.6	–	29.1	22.2	22.7	30.8	–	12.7	66.6	16.3	–	25.7	19.8	20.0	26.8

T 15643	126.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 5300 **& Z85** P235/75R15	2097	1844	3941	2753	2896	–	14.2	68.1	17.8	–	28.0	21.3	21.7	29.6	–	12.3	65.9	15.7	–	24.9	19.2	19.3	25.9
[1] 5300 **& Z71** P265/75R15	2172	1882	4054	2753	2896	–	14.9	68.8	18.5	–	28.7	22.0	22.4	30.3	–	13.3	66.7	16.6	–	25.7	20.0	20.1	26.7

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

S/T 15603 Midsize Chassis Cab

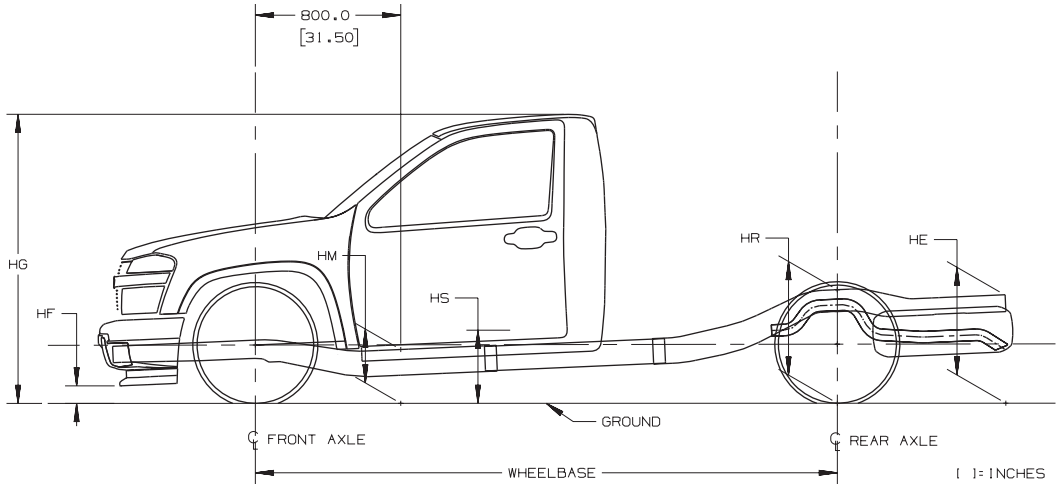

TD006095d

Heights (To Ground)

HF .....Bottom of Front Air Deflector or Bumper

HG .....Roof Height

HM .....Normal Top of Frame

HP .....Top of Tailgate (Down)

HR .....Top of Frame at Centerline of Rear Axle

HS .....Step H-Point-Front

HS2 .....Step H-Point-Second

HT .....Rear Cargo Load Height

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

VEHICLE AND FRAME HEIGHT CHARTS

S 15603	126.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 5300 **& Z71** P265/75R15	1967	1171	3138	2753	2896	–	14.7	68.8	18.8	–	29.5	22.6	–	–	–	12.6	65.9	16.2	–	25.8	19.7	–	–
[1] 5300 **& Z71** P235/75R15	1967	1171	3138	2753	2896	–	14.1	68.2	18.2	–	28.9	21.9	–	–	–	11.9	65.3	15.5	–	25.2	19.0	–	–

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required 2) Optional GVWR — contains minimum equipment required (—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

C/K Fullsize Pickups

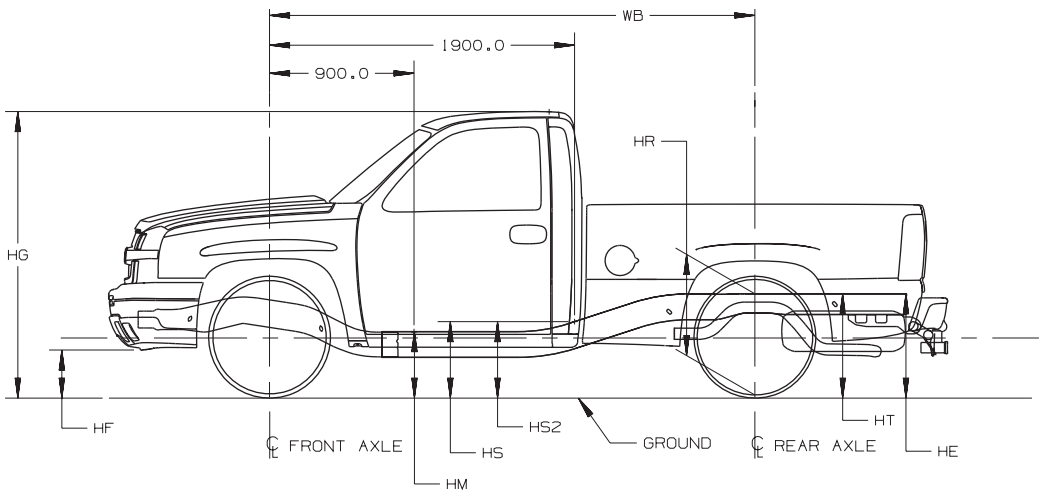

TD006040a

Heights (To Ground)

HE .....Top of Frame at End

HF .....Bottom of Front Air Deflector or Bumper

HG .....Roof height to ground

HM .....Normal Top of Frame

HP .....Top of Tailgate

HR .....Top of Frame at Centerline of Rear Axle

HS .....Step H-Point-Front

HS2 .....Step H-Point-Second

HT .....Rear Cargo Load Height

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

VEHICLE AND FRAME HEIGHT CHARTS

C/K Fullsize Chassis-Cabs

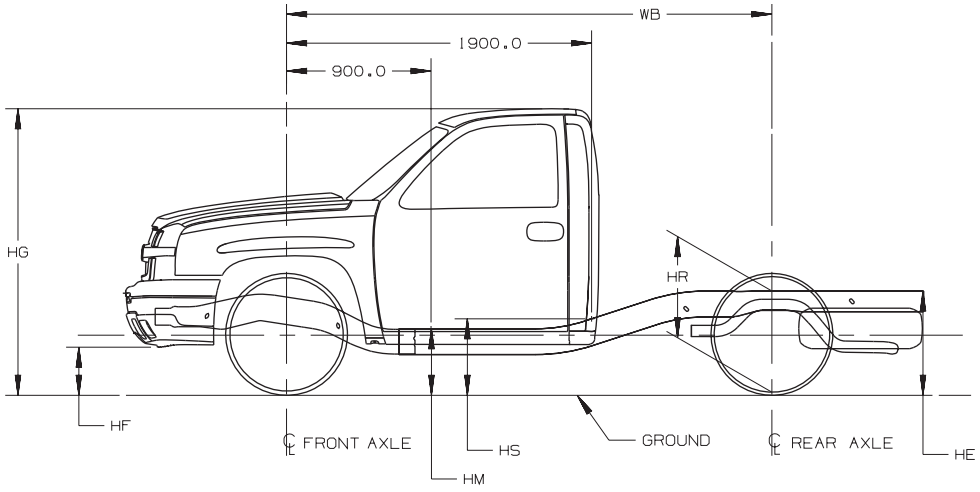

TD006040b

Heights (To Ground)

HE .....Top of Frame at End

HF .....Bottom of Front Air Deflector or Bumper

HG .....Roof height to ground

HM .....Normal Top of Frame

HP .....Top of Tailgate

HR .....Top of Frame at Centerline of Rear Axle

HS .....Step H-Point-Front

HS2 .....Step H-Point-Second

HT .....Rear Cargo Load Height

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

VEHICLE AND FRAME HEIGHT CHARTS

C 15703	119.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 6100 P245/70R17	2457	1704	4161	3150	3686	30.3	10.3	72.0	17.1	—	29.1	20.4	—	33.0	23.9	9.0	69.2	14.8	—	24.2	18.1	—	26.3

C 15903	133.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 6400 P245/70R17	2536	1779	4315	3150	3686	30.3	10.4	71.8	17.0	—	29.1	20.3	—	33.0	24.4	9.4	69.1	14.9	—	24.5	18.2	—	26.8

C 15753	143.5" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 6200 P235/75R16	2689	1859	4548	3600	3686	29.3	10.1	71.5	16.4	—	28.3	19.7	20.7	31.9	23.6	8.0	69.4	14.3	—	24.0	17.6	18.5	26.1
[2] 6200 P245/70R17	2689	1859	4548	3600	3686	29.6	10.4	71.9	16.8	—	28.7	20.1	21.1	32.3	24.0	8.4	69.7	14.6	—	24.3	18.0	18.9	30.0

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

C 15953	157.5" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 6400 P245/70R17	2886	1915	4801	3600	3686	29.5	10.6	71.6	16.7	—	28.6	20.0	20.8	32.0	24.0	9.2	69.5	14.9	—	24.3	18.2	18.8	26.5

C 15543	143.5" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 6800 P245/70R17	2881	2102	4984	3650	4000	27.3	10.9	71.3	16.6	—	29.1	19.7	20.3	30.1	22.5	9.2	68.2	14.6	—	23.4	17.8	18.2	25.3

C 15743	153.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 8600 LT245/75R16	3111	2330	5442	4410	6000	34.0	13.3	77.2	20.2	—	33.2	24.9	25.6	36.5	28.5	11.3	75.0	18.0	—	28.9	22.7	23.2	31.0

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required 2) Optional GVWR — contains minimum equipment required (—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

K 15703	119.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 6400 P265/70R17	2678	1753	4431	3925	3750	32.7	12.7	74.4	19.5	—	31.5	22.8	—	35.3	26.3	9.5	71.9	16.8	—	26.7	20.1	—	28.8

K 15903	133.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 6400 P265/70R17	2764	1818	4582	3925	3750	32.5	12.8	74.1	19.3	—	31.3	22.6	—	35.1	26.3	9.8	71.7	16.7	—	26.7	20.1	—	28.7

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required 2) Optional GVWR — contains minimum equipment required (—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

K 15753	143.5" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 6400 P245/75R16	3054	1924	4979	3650	3600	31.1	12.8	73.5	18.4	–	30.2	21.7	22.7	33.7	25.8	11.0	71.7	16.7	–	26.2	20.1	20.7	28.3
[2] 6400 P265/70R17	3054	1924	4979	3650	3600	31.7	12.8	74.1	19.1	–	30.8	22.4	23.3	34.3	26.5	11.6	72.3	17.4	–	26.8	20.7	21.3	28.9
[2] 6400 P275/55R20	3159	2076	5236	3650	3600	31.5	13.2	74.1	19.2	–	30.7	22.5	23.3	34.0	26.8	12.4	72.5	18.0	–	27.1	21.3	21.8	29.2
[1] 6900 P245/75R16	3023	2302	5326	3925	4000	30.8	12.3	73.3	18.4	–	30.0	21.7	22.5	33.4	25.6	10.1	71.4	16.2	–	26.0	19.6	20.4	28.1
[2] 6900 **& NYS** LT245/75R16	3023	2302	5326	3925	4000	31.0	12.7	73.7	18.7	–	30.3	22.1	22.9	33.6	26.2	10.6	71.8	16.7	–	26.4	20.0	20.8	28.6
[2] 6900 **& NYS** P265/75R16	3023	2302	5326	3925	4000	31.4	12.9	74.0	19.0	–	30.6	22.3	23.2	34.0	26.3	10.7	72.0	16.9	–	26.6	20.2	21.1	28.7
[2] 6900 P265/70R17	3023	2302	5326	3925	4000	30.6	12.7	73.9	18.9	–	30.6	22.2	23.1	34.0	26.3	10.5	72.0	16.7	–	26.6	20.0	21.0	28.8

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required 2) Optional GVWR — contains minimum equipment required (—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

K 15953	157.5" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 6400 P265/70R17	3118	1992	5111	3925	3750	32.2	12.8	74.2	19.1	—	31.2	22.4	23.3	34.8	26.5	11.1	72.6	17.5	—	26.9	20.8	21.8	28.9

K 15543	153.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 7000 P265/70R17	3137	2170	5308	3925	4000	29.8	13.2	73.8	19.0	—	29.7	22.1	22.7	32.7	25.0	11.7	71.8	17.2	—	25.9	20.4	20.7	27.8
[2] 7000 P265/70R17	3137	2170	5308	3925	4000	29.8	13.1	73.7	18.9	—	29.6	22.0	22.6	32.6	24.8	11.6	71.7	17.1	—	25.8	20.3	20.5	27.7
[2] 7000 P275/55R20	3137	2170	5308	3925	4000	30.1	13.5	74.1	19.3	—	30.0	22.4	23.0	33.0	25.3	12.1	72.1	17.5	—	26.2	20.7	21.0	28.1

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

C 25903	133.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 9200 **AF** LT245/75R16	3395	1942	5338	4410	6084	35.6	12.9	74.7	20.5	–	34.2	23.4	–	36.1	28.6	11.8	72.2	18.3	–	29.0	20.9	–	29.0
[1] 8500 LT245/75R16	2990	2610	5601	4100	6000	33.4	13.3	73.9	20.2	–	32.6	22.9	–	33.9	28.4	11.7	72.3	18.3	–	28.9	20.9	–	28.8
[2] 8500 **& ZW9** LT245/75R16	3011	2329	5341	4100	6000	34.2	13.2	74.2	20.3	–	33.1	23.1	–	–	28.4	11.7	72.3	18.3	–	28.9	21.0	–	–
[1] 9200 LT245/75R16	2866	2177	5044	4410	6084	34.6	13.2	76.4	20.4	–	33.4	25.2	–	37.1	28.6	11.0	73.8	17.7	–	28.9	22.4	–	31.1
[2] 9200 **& ZW9** LT245/75R16	2870	1813	4683	4410	6084	35.5	13.0	76.8	20.6	–	34.1	25.4	–	–	28.6	11.0	73.8	17.7	–	28.9	22.4	–	–

C 25753	143.5" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 9200 LT245/75R16	3033	2187	5221	4410	6084	34.5	13.2	76.8	20.4	–	33.6	25.1	25.7	37.1	28.7	11.3	74.0	17.9	–	28.9	22.5	22.9	31.2

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

C 25953	157.5" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[2] 8500 LT245/75R16	3226	2806	6033	4500	6084	33.0	13.4	75.9	20.0	–	32.4	24.6	25.0	35.5	28.3	11.3	74.9	18.1	–	28.9	22.7	23.2	30.8
[1] 9200 LT245/75R16	3119	2247	5367	4500	6084	33.5	13.2	76.5	20.2	–	33.5	24.9	25.5	36.9	28.7	11.2	74.1	17.8	–	28.9	22.4	22.8	31.1
[2] 9200 **AF** LT245/75R16	3687	2336	6024	4500	6084	34.4	13.0	76.4	20.1	–	33.4	24.8	25.4	36.9	28.5	12.1	74.6	18.4	–	29.0	23.0	23.3	31.0

C 25743	143.5" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 9200 LT245/75R16	3068	2304	5373	4410	6084	34.2	13.2	77.4	20.3	–	33.4	25.0	25.7	36.7	28.7	11.4	74.5	17.9	–	28.9	22.5	23.0	31.2

C 25943	157.5" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 9200 LT245/75R16	3172	2368	5541	4670	6084	34.1	13.2	77.1	20.1	–	33.2	24.8	25.5	–	28.7	11.0	74.4	17.7	–	28.9	22.3	22.8	–
[2] 9200 **& ZW9** LT245/75R16	3184	1999	5184	4670	6084	35.0	13.1	77.5	20.3	–	34.0	25.0	25.8	–	28.7	11.0	74.4	17.7	–	28.9	22.3	22.8	–

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required 2) Optional GVWR — contains minimum equipment required (—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

K 25903	133.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[2] 8500 **AF** LT245/75R16	3293	2704	5998	4500	6084	33.3	13.2	75.6	20.1	–	32.5	24.8	–	35.8	28.1	11.3	74.8	18.2	–	28.8	22.9	–	30.5
[1] 9200 **& ZW9** LT245/75R16	3133	1802	4936	4500	6084	35.6	12.9	76.3	20.6	–	34.2	25.4	–	–	28.5	11.2	74.0	17.9	–	28.8	22.6	–	–
[2] 9200 **& E63** LT245/75R16	3184	2163	5348	4500	6084	34.7	13.0	76.0	20.4	–	33.5	25.1	–	37.2	28.5	11.3	74.1	18.0	–	28.8	22.6	–	31.0
[2] 9200 **& VYU** LT245/75R16	3192	2163	5356	4800	6084	34.7	13.1	76.0	20.4	–	33.5	25.2	–	37.2	28.5	10.8	74.1	17.7	–	28.8	22.4	–	30.9

K 25753	143.5" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 9200 LT245/75R16	3337	2249	5587	4800	6084	34.3	13.1	76.7	20.3	–	33.4	25.0	25.6	36.8	28.5	10.9	74.2	17.8	–	28.8	22.4	22.9	31.0
[2] 9200 **& VYU** LT245/75R16	3386	2353	5740	4800	6084	33.9	13.2	76.5	20.2	–	33.0	24.9	25.4	36.4	28.4	11.1	74.3	17.9	–	28.8	22.5	22.9	30.9

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

K 25953	157.5" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[2] 8500 **AF** LT245/75R16	3472	2811	6284	4500	6084	33.0	13.3	75.9	19.9	–	32.3	24.5	24.9	35.5	28.1	11.7	75.1	18.3	–	28.8	22.9	23.3	30.6
[1] 9200 LT245/75R16	3374	2258	5633	4670	6084	34.3	13.1	76.5	20.2	–	33.4	24.9	25.4	36.8	28.5	11.3	74.3	17.9	–	28.9	22.5	22.9	31.0
[2] 9200 **& VYU** LT245/75R16	3383	2258	5642	4800	6084	34.3	13.2	76.5	20.2	–	33.4	24.9	25.4	36.8	28.5	11.2	74.3	17.8	–	28.9	22.5	22.9	30.9

K 25743	153.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 8600 LT245/75R16	3414	2404	5819	4410	6000	33.8	13.3	77.1	20.1	–	33.0	24.8	25.5	36.3	28.3	11.7	75.1	18.3	–	28.9	22.9	23.4	30.8
[1] 9200 LT245/75R16	3340	2446	5787	4670	6084	33.9	13.2	77.1	20.1	–	33.1	24.8	25.5	36.4	28.6	11.2	74.7	17.9	–	28.9	23.8	23.0	31.0
[2] 9200 **& VYU** LT245/75R16	3419	2532	5952	4800	6084	33.6	13.2	77.1	20.1	–	32.9	24.8	25.4	36.1	28.5	11.2	74.8	17.9	–	28.9	22.5	23.1	31.0

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

K 25943	167.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 9200 LT245/75R16	3451	2577	6029	4800	6084	33.6	13.3	76.8	20.0	–	32.8	24.7	25.3	36.1	28.5	11.3	74.9	17.9	–	28.9	22.5	23.0	31.0
[2] 9200 **& ZW9** LT245/75R16	3463	2208	5672	4800	6084	34.5	13.2	77.2	20.2	–	33.5	24.9	25.6	37.0	28.5	11.3	74.9	17.9	–	28.9	22.5	23.0	31.0

C 35953	157.5" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 11400 LT215/85R16	3156	2767	5924	4670	8550	35.7	13.1	76.8	20.3	–	34.0	25.1	25.7	37.6	28.6	11.1	74.4	17.6	–	28.9	22.2	22.6	31.0

C 35943	167.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 11400 LT215/85R16	3244	2760	6005	4670	8550	35.0	13.1	77.5	20.3	–	34.0	25.0	25.8	37.5	28.5	11.3	75.0	17.7	–	28.9	22.3	22.7	31.0
[2] 11400 **& ZW9** LT215/85R16	3260	2347	5608	4670	8550	35.9	13.0	77.9	20.5	–	34.7	25.3	26.2	–	28.5	11.4	75.0	17.7	–	28.9	22.3	22.7	–

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

K 35903	133.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 9900 **& VYU** LT265/75R16	3141	2014	5156	4800	6500	37.2	13.4	77.3	21.4	–	35.5	26.3	–	39.7	30.1	11.3	74.7	18.3	–	30.1	23.0	–	32.6
[1] 9900 **& VYU** LT265/75R16	3139	2332	5472	4800	6500	36.4	13.5	77.0	21.2	–	34.9	26.1	–	–	30.1	11.3	74.7	18.3	–	30.1	23.0	–	–
[1] 11400 LT215/85R18	3137	2565	5703	4500	8550	35.7	13.0	76.4	20.7	–	34.3	25.5	–	38.2	28.5	11.4	74.3	17.9	–	28.9	22.5	–	30.9
[2] 11400 **& ZW9** LT215/85R16	3143	2238	5382	4500	8550	36.5	12.8	76.7	20.8	–	34.9	25.7	–	–	28.4	11.4	74.3	17.9	–	28.9	22.5	–	–
[2] 11400 **& VYU** LT215/85R16	3146	2565	5712	4800	8550	35.7	12.9	76.4	20.6	–	34.3	25.5	–	38.2	28.5	10.8	74.3	17.6	–	28.9	22.3	–	30.9
[2] 11400 **& VYU** LT215/85R16	3151	2238	5390	4800	8550	36.5	12.8	76.7	20.8	–	34.9	25.7	–	–	28.4	10.9	74.3	17.6	–	28.9	22.3	–	–

K 35953	157.5" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 9900 **& SRW** LT265/75R16	3372	2463	5836	4800	6500	35.2	13.8	77.2	20.9	–	34.2	25.6	26.1	37.7	29.1	11.8	74.6	18.3	–	29.4	23.0	23.3	31.6
[2] 11400 LT215/85R16	3388	2712	6101	4800	8550	35.0	13.1	76.8	20.3	–	33.9	25.1	25.7	37.5	27.5	11.4	74.4	17.6	–	28.2	22.2	22.4	30.0

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

K 35943	167.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 9900 LT265/75R16	3478	2788	6267	4800	6500	35.3	13.8	77.9	20.8	–	34.3	25.5	26.3	37.8	30.0	12.0	75.7	18.5	–	30.1	23.2	23.7	32.5
[2] 9900 **& ZW9** LT265/75R16	3492	2373	5866	4800	6500	36.3	13.6	78.4	21.0	–	35.1	25.7	26.7	–	30.0	12.0	75.7	18.5	–	30.1	23.2	23.7	–
[1] 11400 LT215/85R16	3499	2888	6388	4800	8550	34.7	13.2	77.4	20.2	–	33.7	25.0	25.7	37.2	28.4	11.5	75.1	17.8	–	28.9	22.4	22.8	30.9
[2] 11400 **& ZW9** LT215/85R16	3513	2472	5986	4800	8550	35.7	13.0	77.8	20.4	–	34.5	25.2	26.1	–	28.4	11.5	75.2	17.9	–	28.9	22.5	22.8	–

C 36003	137.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 11400 LT215/85R16	2990	2275	5266	4500	8550	33.5	13.0	76.2	20.6	–	32.0	25.3	–	–	26.8	11.0	74.4	17.8	–	27.1	22.4	–	–

C 36053	161.5" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 11400 LT215/85R16	3232	2497	5730	4670	8550	33.0	13.1	76.7	20.4	–	31.7	25.0	25.6	–	26.8	11.2	74.6	17.8	–	27.1	22.4	22.8	–

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required 2) Optional GVWR — contains minimum equipment required (—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

C 36403	161.5" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 11400 LT215/85R16	3120	2229	5350	4670	8550	33.4	13.1	76.0	20.5	–	32.0	25.1	–	–	26.8	11.0	74.5	17.7	–	27.1	22.3	–	–

K 36003	137.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 12000 LT215/85R16	3249	2300	5550	4670	8600	33.2	13.0	76.1	20.5	–	31.7	25.2	–	–	25.8	11.3	72.5	17.7	–	26.3	22.2	–	–
[2] 12000 **& VYU** LT215/85R16	3249	2300	5550	4800	8600	33.3	13.0	76.2	20.6	–	31.8	25.3	–	–	25.9	11.1	73.8	17.6	–	26.4	22.2	–	–

K 36053	161.5" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 12000 LT215/85R16	3537	2510	6048	4800	8600	32.7	13.1	76.6	20.3	–	31.5	25.0	25.5	–	25.9	11.6	74.1	17.9	–	26.4	22.4	22.6	–

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required 2) Optional GVWR — contains minimum equipment required (—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

K 36403	161.5" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 12000 LT215/85R16	3401	2273	5675	4800	8600	33.2	13.1	75.9	20.4	–	31.8	25.1	–	–	25.9	11.4	74.0	17.7	–	26.4	22.2	–	–

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required 2) Optional GVWR — contains minimum equipment required (—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

C/K 15000/25000 Fullsize Utility

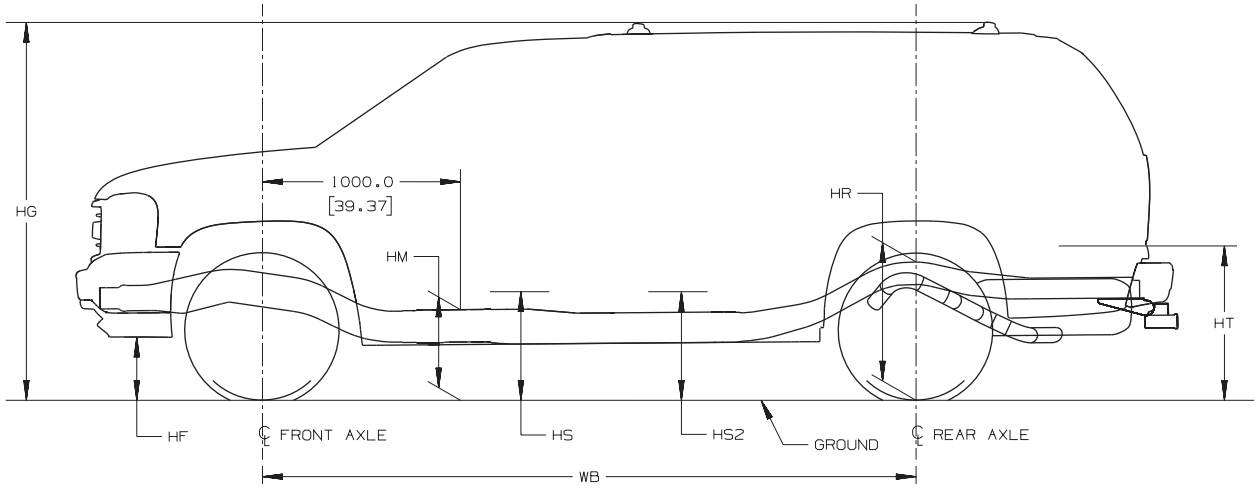

TD006062a

Heights (To Ground)

HE .....Top of Frame at End

HF .....Bottom of Front Air Deflector or Bumper

HG .....Roof height to ground

HM .....Normal Top of Frame

HP .....Top of Tailgate

HR .....Top of Frame at Centerline of Rear Axle

HS .....Step H-Point-Front

HS2 .....Step H-Point-Second

HT .....Rear Cargo Load Height

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

VEHICLE AND FRAME HEIGHT CHARTS

C 15706	116.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 6500 P265/70R17	2583	2382	4966	3200	3750	–	13.1	77.0	18.0	–	28.9	22.3	22.8	31.5	–	11.1	75.2	16.6	–	26.8	20.4	20.9	29.0
[2] 6500 P265/70R16	2583	2382	4966	3200	3750	–	12.6	76.6	18.0	–	28.4	21.8	22.3	31.0	–	10.6	74.7	16.2	–	26.4	19.9	20.5	28.5
[2] 6500 P245/75R16	2583	2382	4966	3200	3750	–	12.6	76.5	18.0	–	28.4	21.8	22.3	31.0	–	10.6	74.7	16.1	–	26.3	19.9	20.4	28.5
[2] 6500 P265/70R17	2583	2382	4966	3200	3750	–	13.0	77.0	18.4	–	28.8	22.2	22.7	31.4	–	11.0	75.1	16.5	–	26.8	20.3	20.9	28.9
[1] 6800 P265/70R17	2580	2478	5059	3200	4000	–	13.2	77.1	18.3	–	28.6	22.2	22.6	31.2	–	11.1	75.5	16.6	–	26.8	20.4	20.9	29.0
[2] 6800 P265/70R16	2580	2478	5059	3200	4000	–	12.7	76.7	17.9	–	28.2	21.7	22.1	30.7	–	10.6	75.0	16.1	–	26.4	19.9	20.5	28.6
[2] 6800 P245/75R16	2580	2478	5059	3200	4000	–	12.6	76.6	17.8	–	28.1	21.7	22.1	30.7	–	10.6	75.0	16.1	–	26.3	19.9	20.4	28.5
[2] 6800 P265/70R17	2580	2478	5059	3200	4000	–	13.1	77.1	18.3	–	28.6	22.1	22.6	31.1	–	11.0	75.4	16.5	–	26.8	20.3	20.9	28.9
[2] 6800 **& Z55** P265/70R17	2590	2498	5089	3200	4000	–	13.2	77.0	18.2	–	28.4	22.1	22.5	30.9	–	11.3	75.7	16.2	–	26.3	20.1	20.4	28.7

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

C 15906	130.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 7000 P265/70R17	2719	2499	5219	3200	4000	—	13.0	76.8	18.4	—	29.1	22.2	22.8	31.8	—	12.0	74.3	16.4	—	25.9	20.4	20.4	27.8
[2] 7000 P265/70R16	2719	2499	5219	3200	4000	—	12.6	76.4	18.0	—	28.6	21.8	22.4	31.3	—	11.6	73.8	16.0	—	25.4	20.0	20.0	27.4
[2] 7000 P245/75R16	2719	2499	5219	3200	4000	—	12.5	76.3	19.6	—	27.5	21.7	22.3	31.2	—	11.5	73.8	17.5	—	24.3	19.9	19.9	27.3
[2] 7000 P265/70R17	2719	2499	5219	3200	4000	—	13.0	76.8	20.1	—	27.9	22.2	22.8	31.7	—	12.0	74.2	17.9	—	24.7	20.4	20.4	27.7

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required 2) Optional GVWR — contains minimum equipment required (—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

K 15706	116.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 6800 P245/75R16	2764	2426	5191	3600	3750	–	12.4	77.1	18.2	–	28.8	21.9	22.5	31.5	–	10.1	75.3	16.2	–	27.8	19.9	20.2	27.8
[2] 6800 P265/70R16	2764	2426	5191	3600	3750	–	12.4	77.2	18.2	–	28.9	22.0	22.6	31.6	–	10.1	75.4	16.2	–	25.9	19.9	20.3	27.9
[2] 6800 P265/70R17	2764	2426	5191	3600	3750	–	12.9	77.7	18.7	–	29.3	22.4	23.1	32.1	–	10.4	75.8	16.5	–	26.3	20.4	20.7	28.4
[2] 6800 LT245/75R16	2764	2426	5191	3600	3750	–	12.6	77.4	18.4	–	29.0	22.1	22.8	31.8	–	10.4	75.6	16.5	–	26.1	20.2	20.5	28.2
[2] 6800 P255/70R16	2764	2426	5191	3600	3750	–	12.1	76.9	17.9	–	28.5	21.6	22.3	31.3	–	9.8	75.0	15.9	–	25.5	19.6	19.9	27.6
[2] 6800 **& Z71 & BPH** P265/70R17	2769	2439	5209	3600	3750	–	13.0	77.2	18.3	–	28.7	22.2	22.6	31.3	–	10.4	75.5	16.5	–	26.8	20.2	20.9	29.0
[2] 6900 P245/75R16	2762	2522	5285	3600	4000	–	12.4	77.0	18.0	–	28.6	21.8	22.4	31.3	–	10.1	75.1	16.0	–	25.2	19.8	19.9	27.0
[2] 6900 P265/70R16	2762	2522	5285	3600	4000	–	12.5	77.0	18.1	–	28.7	21.9	22.5	31.3	–	10.2	75.2	16.1	–	25.3	19.8	20.0	27.1
[2] 6900 P265/70R17	2762	2522	5285	3600	4000	–	13.0	77.5	18.6	–	29.1	22.3	22.9	31.8	–	10.6	75.6	16.6	–	25.7	20.3	20.4	27.5
[2] 7000 P265/70R17	2852	2644	5497	3550	4000	–	13.1	76.6	17.9	–	28.0	21.9	22.1	30.4	–	10.9	75.0	16.2	–	25.6	20.0	20.3	27.5
[2] 7000 P275/55R20	2852	2644	5497	3550	4000	–	13.6	77.1	18.4	–	28.5	22.3	22.6	30.9	–	11.4	75.5	16.7	–	26.2	20.5	20.8	28.0

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

K 15906	130.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 7200 P245/75R16	2898	2552	5451	3600	4000	—	12.5	76.2	17.8	—	28.5	21.7	22.2	31.1	—	10.7	74.0	15.8	—	25.4	19.7	19.9	27.3
[2] 7200 P265/70R16	2898	2552	5451	3600	4000	—	12.5	76.3	17.9	—	28.5	21.7	22.3	31.2	—	10.8	74.0	15.9	—	25.5	19.7	20.0	27.4
[2] 7200 P265/70R17	2898	2552	5451	3600	4000	—	13.0	76.8	18.4	—	29.0	22.2	22.8	31.7	—	11.2	74.5	16.3	—	25.9	20.2	20.4	27.9
[2] 7200 P265/70R17	2898	2552	5451	3600	4000	—	12.9	76.7	18.3	—	28.9	22.1	22.7	31.6	—	11.1	74.4	16.3	—	25.8	20.1	20.4	27.8
[2] 7200 P255/70R16	2898	2552	5451	3600	4000	—	12.2	75.8	17.6	—	28.2	21.4	22.0	30.9	—	10.4	73.7	15.5	—	25.1	19.4	19.7	27.1
[2] 7200 P265/70R17	3072	2638	5711	3450	4000	—	13.0	76.0	17.9	—	28.2	21.8	22.2	30.7	—	12.3	74.9	16.4	—	26.1	20.4	20.5	28.2

C 25906	130.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 8600 LT245/75R16	2940	2826	5767	3800	5500	—	13.3	77.5	18.9	—	29.7	22.7	23.4	32.5	—	12.1	75.5	17.3	—	27.3	21.1	21.7	27.3
[2] 8600 LT245/75R16	2940	3127	6068	3800	5600	—	13.3	77.7	19.0	—	29.9	22.8	23.5	32.8	—	12.1	75.6	17.3	—	27.2	21.2	21.6	29.2

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

K 25906	130.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 8600 LT245/75R16	3208	2883	6092	4180	5500	–	13.3	77.4	20.6	–	28.5	22.6	23.3	32.4	–	11.7	75.9	19.0	–	26.2	21.1	21.8	29.3
[2] 8600 **& NYS** LT245/75R16	3208	3183	6392	4180	5600	–	13.2	77.7	20.7	–	28.8	22.7	23.5	32.7	–	11.7	76.1	19.1	–	26.1	21.2	21.8	29.1

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required 2) Optional GVWR — contains minimum equipment required (—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

C/K 15000/25000 Fullsize Avalanche

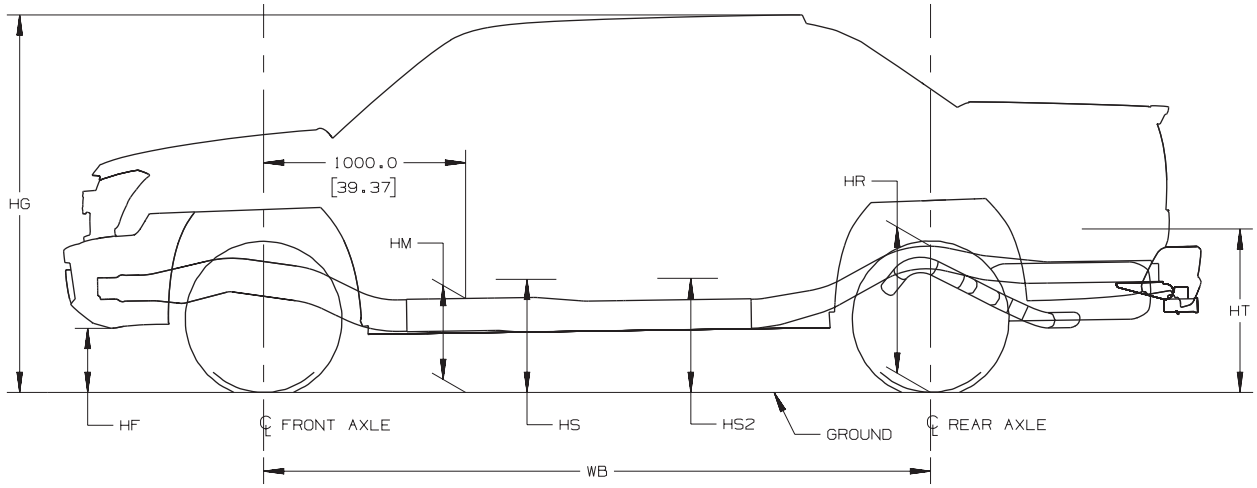

TD006062b

Heights (To Ground)

HE .....Top of Frame at End

HF .....Bottom of Front Air Deflector or Bumper

HG .....Roof height to ground

HM .....Normal Top of Frame

HP .....Top of Tailgate

HR .....Top of Frame at Centerline of Rear Axle

HS .....Step H-Point-Front

HS2 .....Step H-Point-Second

HT .....Rear Cargo Load Height

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

VEHICLE AND FRAME HEIGHT CHARTS

C 15936	130.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 6800 P265/70R16	2782	2640	5423	3400	4000	—	12.0	76.2	17.9	—	28.4	21.7	22.2	32.5	—	10.3	74.5	16.1	—	25.3	20.0	20.1	28.3
[2] 6800 P265/70R17	2791	2657	5449	3400	4000	—	12.6	76.2	18.0	—	28.3	22.0	22.3	32.1	—	10.7	75.2	16.8	—	26.9	20.6	21.2	30.3

K 15936	130.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 7000 P265/70R16	2973	2686	5660	3800	4000	—	12.0	76.1	17.8	—	28.3	21.6	22.1	32.4	—	9.6	74.7	16.1	—	25.3	19.8	20.1	28.4
[2] 7000 **& Z55** P265/70R17	3028	2787	5816	3800	4000	—	12.9	75.7	17.7	—	27.6	21.7	21.8	31.2	—	10.5	75.1	16.3	—	26.9	20.1	20.8	30.3

K 25936	130.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 8600 LT245/75R16	3556	3141	6698	4380	5500	—	12.7	76.8	20.1	—	27.9	22.4	22.9	33.0	—	11.5	75.4	18.7	—	25.3	21.0	21.4	29.3

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required 2) Optional GVWR — contains minimum equipment required (—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

G/H Van - Full Body

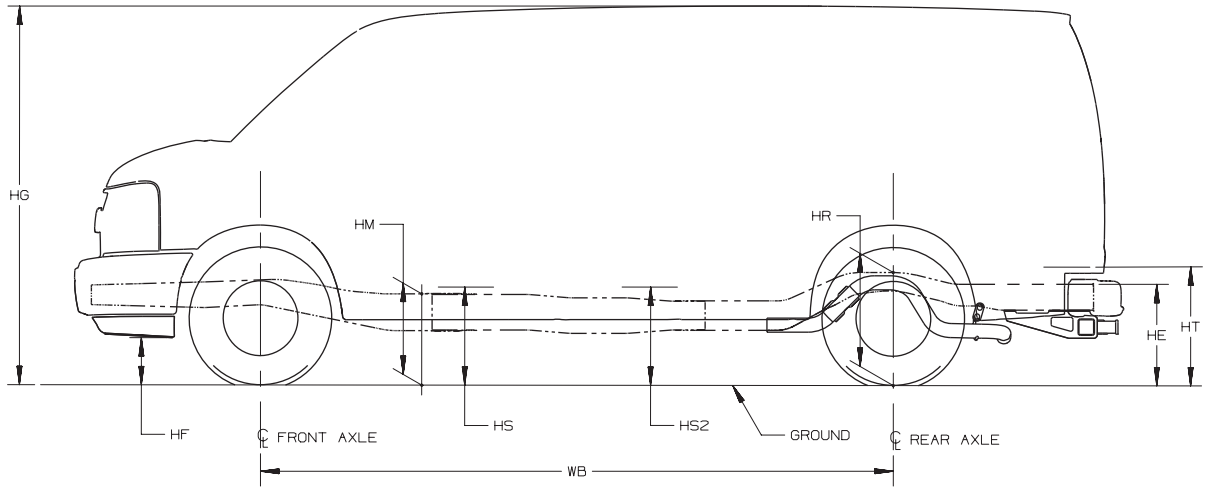

TD006028a

Heights (To Ground)

HE .....Top of Frame at End

HF .....Bottom of Front Air Deflector or Bumper

HG .....Roof Height

HM .....Normal Top of Frame

HR .....Top of Frame at Centerline of Rear Axle

HS .....Step H-Point-Front

HS2 .....Step H-Point-Second

HT .....Rear Cargo Load Height

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

VEHICLE AND FRAME HEIGHT CHARTS

G 13405	135.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 6200 **& YF7** P235/75R16	2671	2131	4802	3300	3200	—	15.3	80.8	17.4	—	24.1	17.6	18.1	25.4	—	14.1	79.4	16.1	—	22.3	16.3	16.7	23.2
[1] 6200 **& YF7** P245/75R16	2671	2131	4802	3300	3200	—	15.7	81.1	17.8	—	24.5	18.0	18.5	25.8	—	14.4	79.8	16.5	—	22.6	16.7	17.1	23.6
[2] 7200 P235/75R16	2656	2030	4686	3600	4000	—	15.0	81.8	17.7	—	25.3	17.9	18.9	27.0	—	13.3	79.1	15.5	—	21.9	15.8	16.3	22.9
[2] 7200 LT225/75R16	2656	2030	4686	3600	4000	—	15.1	81.8	17.7	—	25.3	18.0	18.9	27.0	—	13.4	79.2	15.7	—	22.1	15.9	16.5	23.2

G 13406	135.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 7200 P235/75R16	2772	2465	5237	3600	4000	—	15.1	81.0	17.5	—	24.5	17.7	18.3	25.9	—	13.6	79.1	15.7	—	21.9	15.9	16.4	22.9
[1] 7200 P245/75R16	2772	2465	5237	3600	4000	—	15.5	81.4	17.8	—	24.8	18.1	18.7	26.3	—	14.0	79.5	16.1	—	22.2	16.3	16.7	23.2
[1] 7200 LT225/75R16	2772	2465	5237	3600	4000	—	15.2	81.1	17.5	—	24.5	17.7	18.4	26.0	—	13.7	79.3	15.9	—	22.1	16.1	16.6	23.1

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

H 13405	135.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 7200 P235/75R16	2904	2026	4930	3600	4000	–	14.8	81.9	17.6	–	25.4	17.8	18.8	27.1	–	13.8	79.2	15.9	–	21.9	16.1	16.5	22.8
[1] 7200 LT225/75R16	2904	2026	4930	3600	4000	–	14.9	81.8	17.7	–	25.3	17.9	18.9	27.1	–	14.0	79.4	16.0	–	22.1	16.2	16.6	23.1
[1] 7200 P245/75R16	2904	2026	4930	3600	4000	–	15.2	82.2	18.0	–	25.7	18.2	19.2	27.4	–	14.2	79.6	16.2	–	22.3	16.4	16.8	23.2

H 13406	135.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 7200 P235/75R16	3004	2442	5446	3600	4000	–	14.9	81.0	17.4	–	24.5	17.6	18.3	26.0	–	14.0	79.2	16.0	–	21.9	16.2	16.5	22.8
[1] 7200 LT225/75R16	3004	2442	5446	3600	4000	–	15.0	81.1	17.4	–	24.6	17.7	18.4	26.1	–	14.1	79.4	16.1	–	22.1	16.3	16.7	23.0
[1] 7200 P245/75R16	3004	2442	5446	3600	4000	–	15.3	81.4	17.7	–	24.9	18.0	18.7	26.4	–	14.4	79.6	16.3	–	22.2	16.5	16.9	23.1

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required 2) Optional GVWR — contains minimum equipment required (—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

G 23405	135.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 7300 LT245/75R16	2638	2188	4826	3600	4380	–	15.5	83.2	18.6	–	26.6	18.8	19.9	28.5	–	13.9	80.3	16.5	–	23.0	16.7	17.4	23.9
[2] 8500 LT245/75R16	2806	2790	5596	4100	5360	–	16.8	83.1	19.3	–	26.6	19.5	20.3	28.2	–	14.4	81.6	17.3	–	24.4	17.5	18.5	25.4
[2] 8600 LT225/75R16	2909	2260	5169	4100	5360	–	16.5	83.4	19.3	–	26.9	19.5	20.4	28.6	–	14.5	80.9	17.1	–	23.8	17.3	18.1	24.7

G 23406	135.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 8500 **KL6** LT245/75R16	3006	3118	6124	4100	5360	–	17.2	82.8	19.4	–	26.2	19.6	20.1	27.5	–	15.1	81.6	17.7	–	24.4	17.9	18.8	25.3
[2] 8600 LT225/75R16	3116	2597	5713	4100	5360	–	16.5	82.8	19.0	–	26.3	19.2	20.0	27.9	–	14.8	81.0	17.3	–	23.8	17.5	18.2	24.7
[2] 8600 **& LLY** LT225/75R16	3640	2631	6271	4100	5360	–	16.4	82.7	18.9	–	26.3	19.1	19.9	27.8	–	16.0	81.2	18.0	–	23.8	18.2	18.6	24.5
[2] 8600 **& LLY** LT245/75R16	3640	2631	6271	4100	5360	–	16.8	83.3	19.4	–	26.8	19.7	20.5	28.4	–	16.5	81.8	18.5	–	24.4	18.7	19.1	25.1

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required 2) Optional GVWR — contains minimum equipment required (—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

G 23705	155.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 7300 LT245/75R16	3154	2280	5434	3600	4380	—	15.4	82.9	18.2	—	26.4	18.5	19.5	28.2	—	14.9	80.5	17.0	—	22.9	17.3	17.7	23.7
[2] 8500 LT245/75R16	2973	2776	5749	4300	5360	—	17.2	83.2	19.5	—	26.6	19.7	20.3	28.0	—	14.8	81.7	17.4	—	24.3	17.7	18.6	25.3
[2] 8600 LT225/75R16	3074	2230	5304	4300	5360	—	16.5	83.4	19.2	—	26.9	19.4	20.3	28.6	—	14.5	81.0	17.0	—	23.8	17.3	18.1	24.7
[2] 8600 LT245/75R16	3074	2230	5304	4300	5360	—	17.0	83.9	19.7	—	27.5	19.9	20.8	29.2	—	15.0	81.6	17.6	—	24.3	17.8	18.6	25.3

H 23405	135.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 7300 LT245/75R16	2938	2196	5134	3600	4380	—	15.4	83.2	18.5	—	26.6	18.7	19.9	28.5	—	14.6	80.4	16.9	—	23.0	17.1	17.6	23.8

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required 2) Optional GVWR — contains minimum equipment required (—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

G 33405	135.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 9600 LT245/75R16	2935	2270	5205	4300	6084	—	17.0	84.1	19.7	—	27.6	20.1	21.1	29.4	—	14.9	81.3	17.4	—	24.3	17.7	18.5	25.3

G 33406	135.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 9600 LT245/75R16	3065	2528	5593	4300	6084	—	17.0	83.9	19.7	—	27.5	19.9	20.8	29.1	—	15.0	81.4	17.5	—	24.2	17.7	18.5	25.3

G 33705	155.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 9600 LT245/75R16	3042	2376	5418	4300	6084	—	17.0	83.6	19.6	—	27.2	19.9	20.8	28.8	—	15.1	81.3	17.4	—	24.3	17.7	18.4	25.3

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required 2) Optional GVWR — contains minimum equipment required (—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

G 33706	155.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 9600 LT245/75R16	3258	2605	5863	4300	6084	–	17.0	83.6	19.7	–	27.2	19.8	20.6	28.8	–	15.4	81.4	17.8	–	24.3	17.9	18.6	25.3

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required 2) Optional GVWR — contains minimum equipment required (—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

G/H Van - Fullsize Cutaway

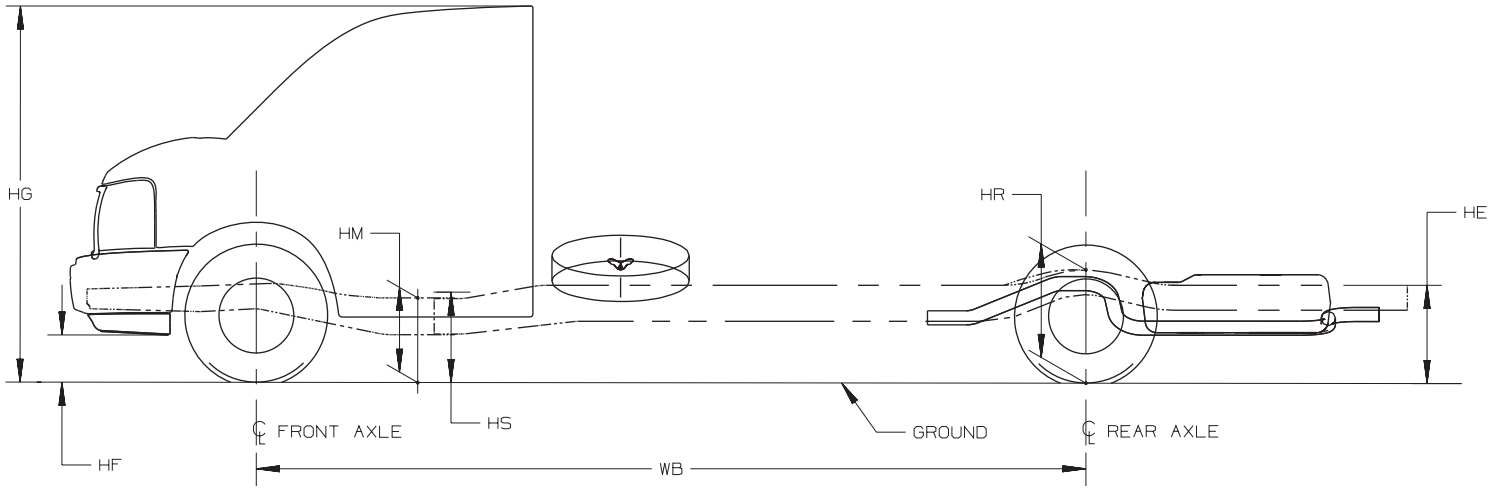

TD006028b

Heights (To Ground)

HE .....**Top of Frame at End**

HF .....**Bottom of Front Air Deflector or Bumper**

HG .....**Roof Height**

HM .....**Normal Top of Frame**

HR .....**Top of Frame at Centerline of Rear Axle**

HS .....**Step H-Point-Front**

HS2 .....**Step H-Point-Second**

HT .....**Rear Cargo Load Height**

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

VEHICLE AND FRAME HEIGHT CHARTS

G 33503	139.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 8600 LT225/75R16	2915	1550	4465	4100	5360	25.0	16.5	82.1	22.9	–	27.2	19.5	–	–	21.4	14.5	80.7	20.9	–	24.6	17.5	–	–
[2] 9600 LT245/75R16	2915	1550	4465	4100	6084	28.9	16.5	83.6	24.8	–	30.0	20.7	–	–	25.1	14.6	81.7	22.5	–	27.0	18.5	–	–
[2] 10,000 LT225/75R16	2956	1827	4783	4100	7500	28.1	16.0	83.0	24.2	–	29.3	20.1	–	–	21.9	14.1	81.8	21.7	–	25.3	17.9	–	–
[2] 12,000 LT225/75R16	2956	1831	4787	4300	8600	28.2	16.0	83.0	24.2	–	29.3	20.2	–	–	22.5	14.1	80.9	21.2	–	25.2	17.5	–	–
[2] 12,300 LT225/75R16	3005	1919	4924	4300	8600	28.4	16.0	83.0	24.3	–	29.4	20.2	–	–	22.7	14.2	80.6	21.1	–	25.3	17.5	–	–

G 33803	159.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 9600 LT245/75R16	3012	1625	4637	4100	6084	28.6	16.6	83.3	24.5	–	30.0	20.6	–	–	24.9	14.8	81.7	22.2	–	27.1	18.5	–	–
[2] 10,000 LT225/75R16	3012	1625	4637	4100	7500	27.9	16.1	82.8	23.9	–	29.3	20.0	–	–	21.7	14.4	81.9	21.4	–	25.3	17.8	–	–
[2] 12,000 LT225/75R16	3012	1625	4637	4300	8600	28.0	16.3	82.9	24.0	–	29.4	20.2	–	–	22.2	14.5	81.0	21.1	–	25.2	17.6	–	–
[2] 12,300 **& YF1** LT225/75R16	3064	1714	4778	4300	8600	28.1	16.2	82.9	24.0	–	29.5	20.1	–	–	22.4	14.5	80.7	21.0	–	25.2	17.6	–	–
[2] 14,050 LT225/75R16	3062	1723	4785	4600	9450	28.0	16.9	83.3	24.3	–	29.6	20.5	–	–	22.3	15.2	80.3	20.9	–	25.0	17.8	–	–

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

G 33903	177.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
[1] 12,000 LT225/75R16	2998	1695	4693	4300	8600	27.9	16.6	83.0	24.0	–	29.6	20.2	–	–	23.3	14.8	81.4	21.4	–	26.0	17.9	–	–
[2] 12,300 **& YF1** LT225/75R16	3051	1774	4825	4300	8600	28.2	16.5	83.0	24.0	–	29.7	20.2	–	–	23.5	14.8	81.1	21.4	–	26.1	17.9	–	–

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required 2) Optional GVWR — contains minimum equipment required (—) = not applicable for this model